

DATA SHEET

Version 2022.07

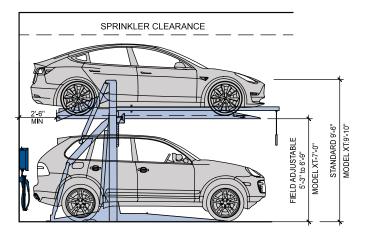




Clearance

S = Standard/SUV C = Compact/Sedan

| MODEL | HEIGHT |
|-------|--------|
| C/C | 10'-6" |
| C/S | 12'-2" |
| S/S | 14'-0" |
| S/S* | 14'-6" |

*LA City requirement



Width

| MODEL | WIDTH |
|-------|--------|
| W01 | 7'-11" |
| W02 | 8'-3" |
| W03 | 8'-6" |
| W04 | 9'-0" |
| W05 | Custom |

WIDTH = Center of Leg to Center of Leg

PARKPLUS DP003 DOUBLE STACKER

The **PARK**PLUS **DP003** Double Stacker is a hydraulic 2-post, 2-level cantilevered vehicle lift for parking cars one above another. The **DP003** raises and locks a platform in place so that a second vehicle can be parked at grade.

Entire assembly comes pre-welded and is assembled in the field. Stackers may be installed as single units or in arrays with shared common legs. Stacker is designed to be mounted on grade, concrete or asphalt. Approved foundation system may be required for installation of stackers.

The **PARK**PLUS **DP003** Double Stacker is designed to be installed indoors and outdoors. Platform height is field adjustable in $1\,^{1}\!\!/_{2}$ " increments. Each city may have minimum height requirements and different clear requirements for code required parking. Owner/Architect should review with local planning and building departments. **MEP coordination with project team must meet code requirements and satisfy equipment clearances.**

Suitable for

- · Standard passenger vehicles
- SUVs

Specifications

Load per Platform: 6,000 lbs.

Weight of Unit: +/- 3,050 lbs.

Length of Platform: 13'-6"

Length incl. Overhang: 16'-6"

Width of Unit: 7'-11" to 9'-0"

Height of Unit: 9'-6" to 9'-10"

Operation: Hydraulic

Control: Push Button Pendant

*Custom Height and Width Available

Power Pack

Hydraulic Power System (HPS)

HPS1: 1-2 units

(208-230V / 1 PH / 60 HZ / 2-3 HP / 18 FLA)

HPS-1P10: 1-30 units

(208-230V / 1 PH / 60 HZ / 10 HP / 40 FLA)

HPS-3P10: 1-30 units

(208-230V / 3 PH / 60 HZ / 10 HP / 28.4 FLA)

Electrical

1 Disconnect required per HPS

3 PH 208-230V / 40Amp

1 PH 208-230V / 60Amp

All control wiring is a Class 2 Circuit 24V

Applications

DP003 Double Stacker can be installed in attended/valet and self-park applications:

- Single & Multi-Family Residential Buildings
- Indoor & Outdoor Installations
- Low & High Rise Buildings
- Commercial Buildings
- Surface Lots





PARKPLUS, INC. HEADQUARTERS 83 BROAD AVENUE FAIRVIEW, NJ 07022 PARKPLUS CALIFORNIA 8640 TAMARACK AVENUE LOS ANGELES, CA 91352 CSLB# 1018794 PARKPLUS FLORIDA, INC. 1111 OLD GRIFFIN ROAD DANIA BEACH, FL 33004

- In-house Design, Manufacturing, Installation & Service
- Minimal Moving Parts Reduced Maintenance
- Galvanized, Commercial-Grade Machines
- Premium Quality Hydraulic Cylinders

PARKPLUS DP003 Double Stacker Parking System | Data Sheet V2022.07



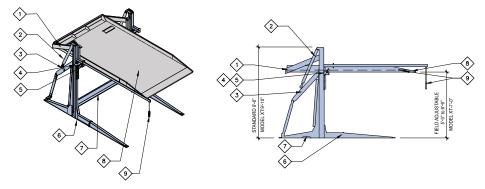



Components

- (1) CRADLE FRAME ASSEMBLY
- 2 HYDRAULIC CYLINDER
- (3) PARALLEL ARM ASSEMBLY
- 4 ADJUSTABLE HEIGHT ASSEMBLY
- 5 SAFETY LOCKS ASSEMBLY
- 6 END LEG ASSEMBLY
- 7 SEISMIC BEAM ASSEMBLY
- 8 PLATFORM ASSEMBLY
- 9 PUSH BUTTON CONTROLS

Layout

PARKPLUS DP003 Double Stacker can be arranged in single or tandem arrays on either side of a drive aisle. Queuing space of at least 2 vehicles must be provided to allow for shuffling of cars. Queuing space may be in drive aisle. For commercial projects, during peak traffic, all platforms will be lowered for quick filling of stackers. Surface space to be provided for code-required Accessible Parking.

ADDITIONAL INFORMATION

Safety

Device is equipped with safety locking system. 'Posi-lock' double suspension system holds full weight of vehicle on platform in locked position. Device can be equipped with individual keyed controller for extra safety. Self-attended applications may require additional sensors to detect objects located under platform or entering the area below platform.

Fire Protection

In most metropolitan areas, car stackers are reviewed as similar to high piled storage and non-building structures. Fire rating of structural components is not required. Sprinklers may be required per following section. Each city may have fire department guidelines.

Fire Sprinklers

Outdoor: 1. Most cities do not require fire sprinklers. **2.** May need to conform to additional zoning regulations and building code requirements.

Indoor: 1. Installation shall be in a sprinklered garage. In tandem array, additional sprinkler requirements may apply. 2. Sprinkler Plans filed and approved by local municipality. 3. Sprinkler system designed as required by NFPA 13 and local building codes. 4. Clear building height within parking area must accommodate height of equipment plus additional requirements for adequate coverage of fire sprinklers.

Temperature

Device is designed to operate between 20° and 120° F. For below freezing environments, hydraulic heaters for Power Packs are recommended.

Loading

Structural design and loading is provided on a project by project basis and is dependant on seismic zones, soil conditions and other environmental conditions.

Warranty

12-month Standard Manufacturer's Warranty on new equipment. Equipment Lifespan: Indoor = 7,500 cycles; Outdoor = 5,000 cycles.

Service

At end of 12-month warranty period a service contract is available upon request.

Rental option may include Service & Maintenance for full term.


Approvals

- MEA/OTCR Certified, City of New York
- LAETL Approved, LARR#930501, City of Los Angeles
- California Seismic Code Compliant
- · Miami Dade County Compliant
- · Approved in Multiple U.S. Cities



PARKPLUS, INC. HEADQUARTERS 83 BROAD AVENUE FAIRVIEW, NJ 07022 PARKPLUS CALIFORNIA 8640 TAMARACK AVENUE LOS ANGELES, CA 91352 CSI B# 1018794 PARKPLUS FLORIDA, INC. 1111 OLD GRIFFIN ROAD DANIA BEACH, FL 33004

HIGH DENSITY PARKING SYSTEMS FOR OVER 50 YEARS

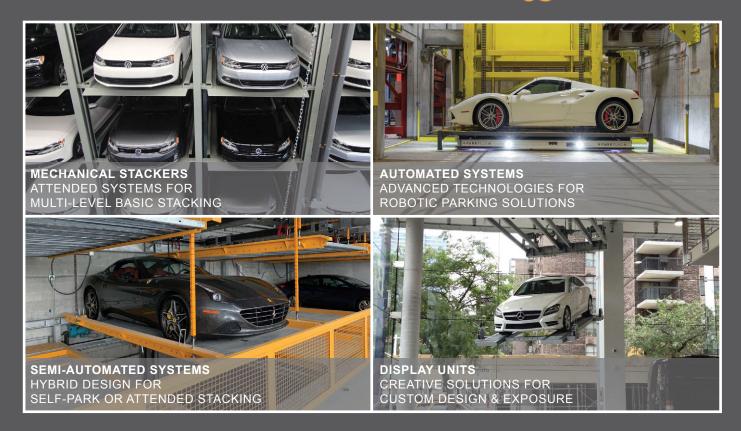

PARKPLUSINC.COM

INFO@PARKPLUSINC.COM

OUR GLOBAL FOOTPRINT



CALL US: 844-4PARKPLUS



PARKPLUS, INC. HEADQUARTERS 83 BROAD AVENUE FAIRVIEW, NJ 07022 PARKPLUS CALIFORNIA 8640 TAMARACK AVENUE LOS ANGELES, CA 91352 CSLB# 1018794 PARKPLUS FLORIDA, INC. 1111 OLD GRIFFIN ROAD DANIA BEACH, FL 33004